

**MODEL # 3715**

**SECTION TYPE:**  
TONGUE & GROOVE

**VINYL TOP SEAL**  
 YES (OPTION)  
 NO

**FOAM TAPE THERMAL BREAK:**

**POLYURETHANE INSULATION:**  
R=12.9; U=.19

**SKIN MATERIAL:**  
27 GA. PRE-PAINTED EXTERIOR STUCCO EMBOSSED MINOR RIBS  
27 GA. PRE-PAINTED WHITE INTERIOR MINOR RIBS

**REINFORCING STRUTS:**

SEE TABLE #4 FOR REINFORCEMENT

- NONE
- 2 1/4" STRUT
- 3" STRUT
- 4" C-CHANNEL

**AIRCRAFT CABLE:**  
7:1 SAFETY FACTOR

**BOTTOM ASTRAGAL:**

- 3 1/2" (STANDARD)
- 7" (OPTIONAL)

**END STILES: (PRE-PAINTED)**

- 18 GA. SINGLE END STILES (THRU 14'2" WIDE)

**FULL-VISION SECTIONS:**  
THRU 18'2" WIDE


- 1/8" DSB
- 1/8" PLEXIGLASS
- 1/8" TEMPERED
- 1/2" INSULATED
- 1/2" INSULATED TEMP \*WHITE AND BROWN ONLY

NOTE: FULL-VISION SECTION AVAILABLE FOR ALL SECTIONS EXCEPT BOTTOM

**STEEL BALL BEARING ROLLER:**

**CENTER HINGE:**  
14 GA.

**BOTTOM BRACKET:**  
12 GA. MIN.

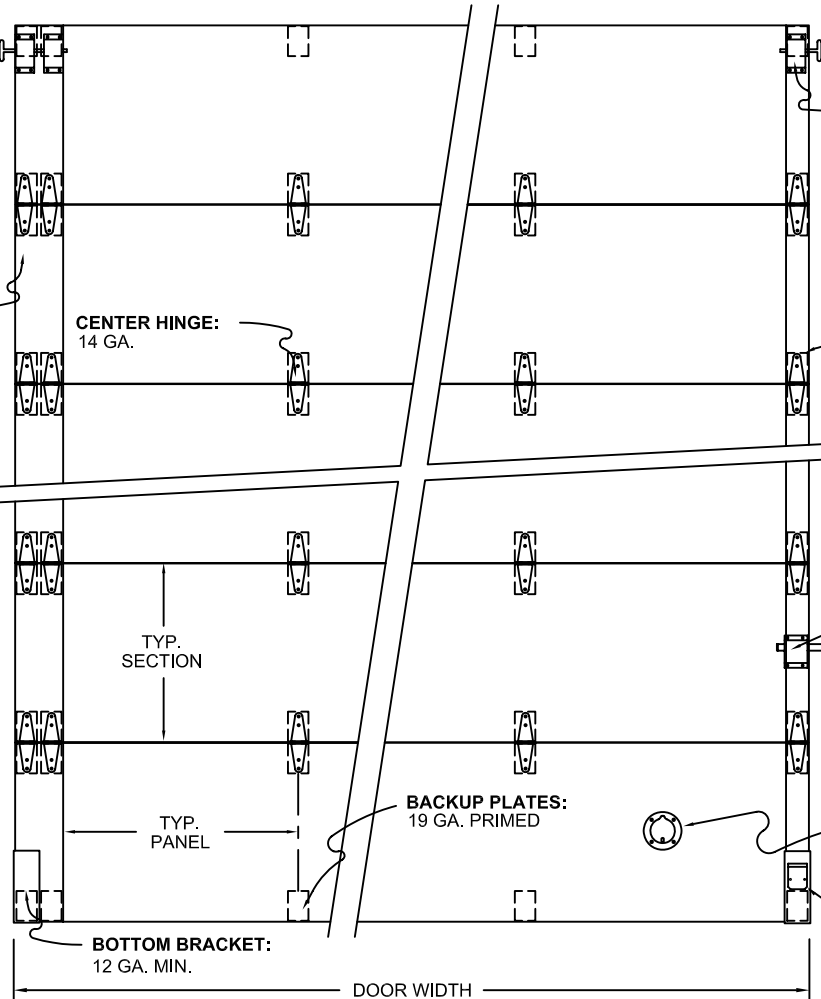

**TOP BRACKET:**  
12 GA.

**ROLLER HINGE:**  
14 GA. MIN.

**EXTERIOR COLOR:**

- WHITE
- BROWN
- TAN
- GRAY

**LOCK:**

- #2 END STILE
- #7 CYLINDER LOCK - NOT AVAILABLE IN FULL-VISION SECTION
- NONE

**EXHAUST PORT:**


- LEFT  3"
- RIGHT  4"
- CENTER
- NONE

**WINDOW SIZE AVAILABILITY:**  
SEE TABLE #3

- 24" x 8"
- 24" x 12"

**GLAZING:**

- SOLID - NO GLAZING
- 1/4" TEMPERED
- 1/2" INSULATED
- 1/2" INSULATED TEMPERED



WINDOW FRAME CONSIST OF AN EXTERIOR FRAME AND AN INTERIOR RETAINER, MADE OF RIGID PVC EXTRUSIONS



CUST:	MODEL #: 3715	QTY:	# OF SECTIONS HIGH (SEE TABLE #1)	SECTIONS TO GLAZE:	<b>SHEET 'M-29'</b> DATE: _____
JOB:	DOOR WIDTH:				
ARCH:	DOOR HEIGHT:	# OF PANELS WIDE (SEE TABLE #2)	PANELS TO GLAZE:		BID #: _____
CONT:					PAGE _____ of _____

**MODEL # 3715**

**SECTION TYPE:**  
TONGUE & GROOVE

**VINYL TOP SEAL**  
 YES (OPTION)  
 NO

**FOAM TAPE THERMAL BREAK:**

**POLYURETHANE INSULATION:**  
R=12.9; U=.19

**SKIN MATERIAL:**  
27 GA. PRE-PAINTED EXTERIOR STUCCO EMBOSSED MINOR RIBS  
27 GA. PRE-PAINTED WHITE INTERIOR MINOR RIBS

**REINFORCING STRUTS:**

SEE TABLE #4 FOR REINFORCEMENT

- NONE
- 2 1/4" STRUT
- 3" STRUT
- 4" C-CHANNEL

**AIRCRAFT CABLE:**  
7:1 SAFETY FACTOR

**BOTTOM ASTRAGAL:**

- 3 1/2" (STANDARD)
- 7" (OPTIONAL)

**END STILES: (PRE-PAINTED)**

- 18 GA. SINGLE END STILES (THRU 14'2" WIDE)

**FULL-VISION SECTIONS:**  
THRU 18'2" WIDE


- 1/8" DSB
- 1/8" PLEXIGLASS
- 1/8" TEMPERED
- 1/2" INSULATED
- 1/2" INSULATED TEMP \*WHITE AND BROWN ONLY

NOTE: FULL-VISION SECTION AVAILABLE FOR ALL SECTIONS EXCEPT BOTTOM

**STEEL BALL BEARING ROLLER:**

**CENTER HINGE:**  
14 GA.

**BOTTOM BRACKET:**  
12 GA. MIN.

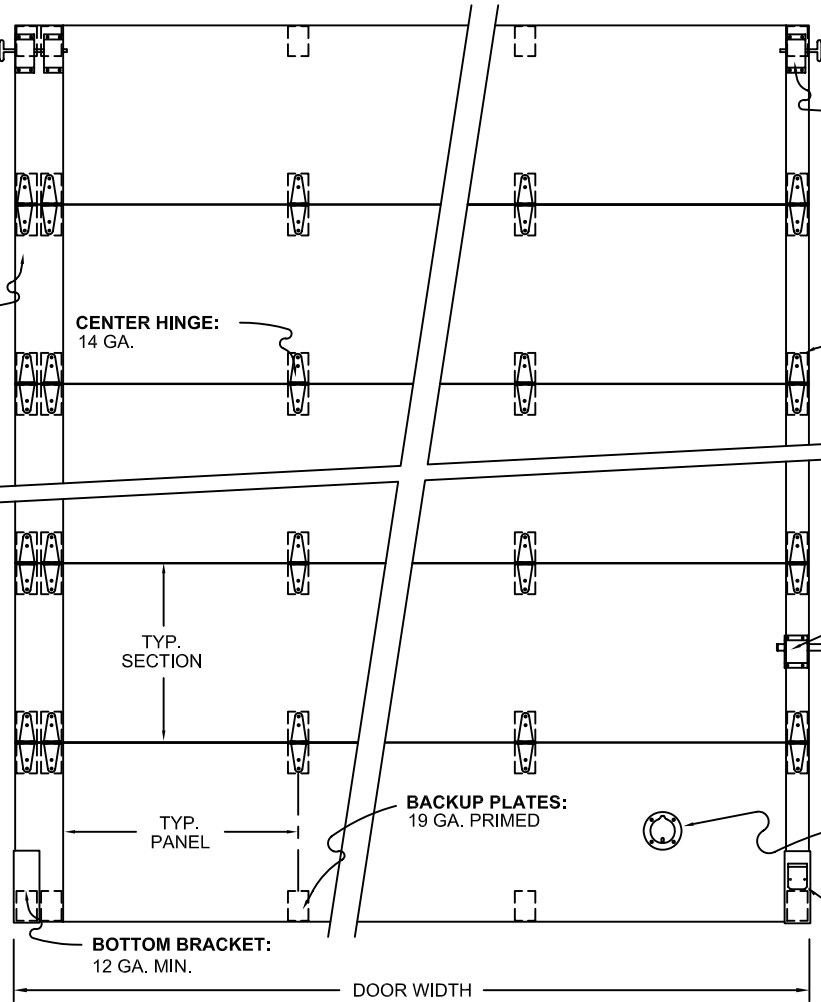

**TOP BRACKET:**  
12 GA.

**ROLLER HINGE:**  
14 GA. MIN.

**EXTERIOR COLOR:**

- WHITE
- BROWN
- TAN
- GRAY

**LOCK:**

- #2 END STILE
- #7 CYLINDER LOCK - NOT AVAILABLE IN FULL-VISION SECTION
- NONE

**EXHAUST PORT:**


- LEFT  3"
- RIGHT  4"
- CENTER
- NONE

**WINDOW SIZE AVAILABILITY:**  
SEE TABLE #3

- 24" x 8"
- 24" x 12"

**GLAZING:**

- SOLID - NO GLAZING
- 1/4" TEMPERED
- 1/2" INSULATED
- 1/2" INSULATED TEMPERED



WINDOW FRAME CONSIST OF AN EXTERIOR FRAME AND AN INTERIOR RETAINER, MADE OF RIGID PVC EXTRUSIONS



CUST:	MODEL #: 3715	QTY:	# OF SECTIONS HIGH (SEE TABLE #1)	SECTIONS TO GLAZE:	<b>SHEET 'M-29'</b> DATE: _____
JOB:	DOOR WIDTH:				
ARCH:	DOOR HEIGHT:	# OF PANELS WIDE (SEE TABLE #2)	PANELS TO GLAZE:		BID #: _____
CONT:					PAGE _____ of _____